

BikeE Corp.

Seat Slider Replacement Guidelines


Supplied Parts: 4 Seat Sliders with reinforcement rings, 4 Screws

Required Tools: #1 phillips screwdriver

1 Remove Seat from Bike

Move quick release lever to open position and remove nut on opposite side. Repeat process for remaining quick release. Remove seat quick release, reinstall nut and set assemblies aside.

Standing behind bike, hold top of seat frame and give the seat frame a sharp jerk to one side to disengage seat frame from bike.

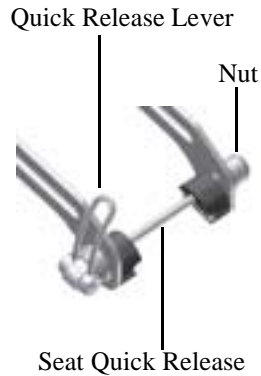

2 Remove Seat Sliders

Using #1 phillips Screwdriver, remove phillips screw that secures seat slider to seat frame. Dispose of seat sliders and screws. Repeat process for remaining three seat sliders.



3 Seat Slider Orientation

Each seat slider has two holes. The larger hole is the seat skewer hole. When installed this should be positioned so that it is above the smaller screw hole, which is located in the center of the seat slider.



4 Installation Basics - Read Before Proceeding

Before installing seat sliders determine what type of tilt you prefer for your sweet seat. For desired tilt, follow diagrams below for correct screw installation. Install the seat sliders in the same hole on both sides. Read step 6 before continuing with seat slider installation.



Forward Tilt



Neutral Tilt



Rearward Tilt

For more information call us at 1.800.231.3136 or chat live with us on our website, www.bikee.com and click on the live chat icon, between 8:00 am and 5:00pm Monday thru Friday Pacific Standard Time
BikeE Corp. - 5125 SW Hout St. - Corvallis, OR 97333

5 Install Seat Sliders

Align screw hole with desired mounting hole on seat frame. Install phillips screw so that seat slider is still loose. Repeat for three remaining seat sliders.



6 Position and Tighten Seat Sliders

Run quick release skewer through seatframe and seat sliders. Only run skewer through far enough to go through opposing side of seatframe but do not run through so far that you cannot see screw on lever side of quick release. Tighten the screws until the flat face of the slider is held firmly against the inside of the seat frame. CAUTION – The slider is made of a plastic material. Over tightening of the screw can strip-out the hole in the slider, making it unusable. Do not over tighten.



7 Reinstall Seat frame on bike

With both quick release skewers removed from seat, stand behind bike. Engage both seat sliders on one side of seat frame on seat rail of bike. Secure engaged side of seat frame against frame by lightly pushing it against bike frame to prevent seat frame from slipping. On the side of the seat frame that is not engaged, push down firmly on seat cushion until seat sliders engage seat rails. Check that all four seat sliders are engaged on seat rail.

Install seat quick release skewers. Make sure that skewer goes through skewer hole in seat slider. Put nut back on seat skewers. With lever in open position, move seat to where you want it. Tighten nuts and close quick release lever.

